




## Assembly Instructions for OPTIONS - 85PHRL

**1. Slide the metal receiver over the metal post. Press both sides of back firmly downward until locked in place.**




**2. Locate the power cords C1 and C2 attached to the seat back and the power cords D1 and D2 at the rear of the seat base. Connect C1 to D1 and C2 to D2. C1 and D1 can be identified by the red tape.**

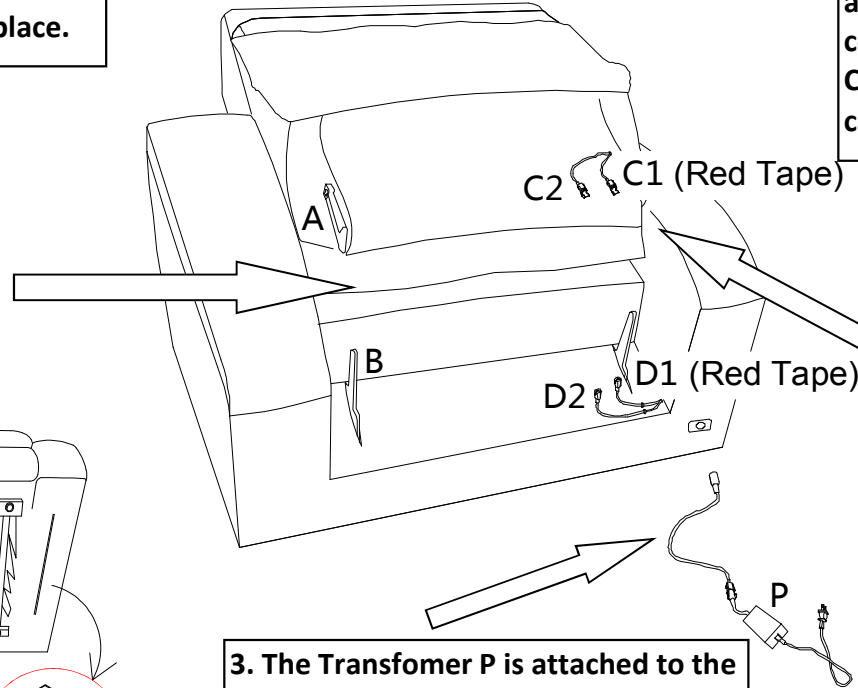


**5. KD Wings (If applicable)**  
Insert the male KD Bracket into the slot of the female Bracket pressing firmly

**3. The Transformer P is attached to the bottom of rail and connect to DC Port located at the rear of arm.**

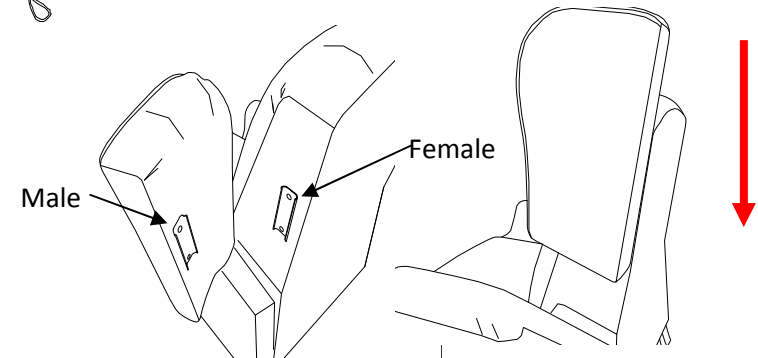

**4. The table is located inside the black dust cover under the RAF Arm. Please remove it and place into the Circular metal base.**

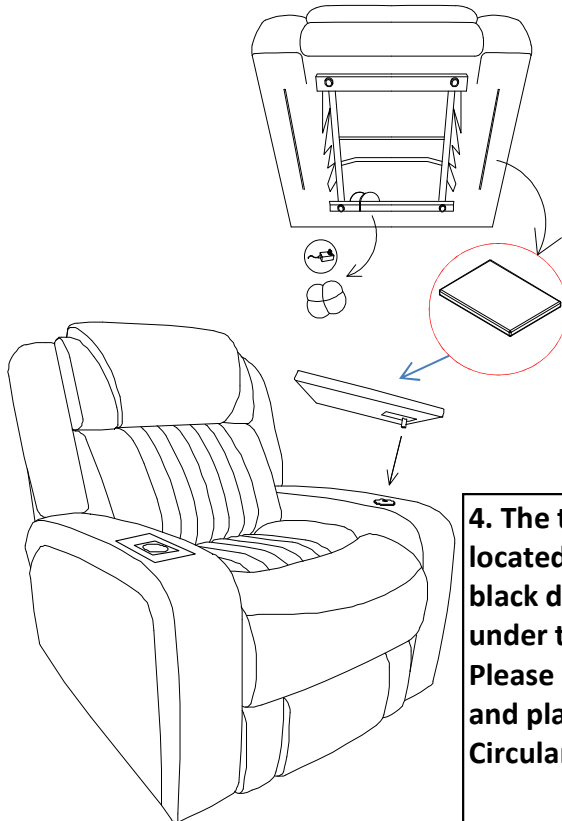

### Note:

**Make sure all PLUGS are connected on the product before plugging power cord into power outlet. If not damage can occur.**

**The USB ports (where applicable) are designed with working voltage of 5V, and can NOT be used to supply power for laptop computers (neither PC or Mac). Plugging a laptop computer to the USB port may end up damaging either the computer or the USB port due to unmatched working voltage.**

