



FLEXSTEEL®

## Power Recliner with Power Headrest Lift Recliner with Power Headrest


### IMPORTANT NOTE

Read these instructions carefully, and familiarize yourself with each procedure before assembling the furniture. Check that you have all the component parts, and familiarize yourself with each part before proceeding.


Take all the fittings out of the plastic bag and separate them into groups. Ensure you have enough space to lay out all the parts before assembly. To prevent damage to the parts, we recommend that you assemble the unit on a soft, level surface.




## Part List

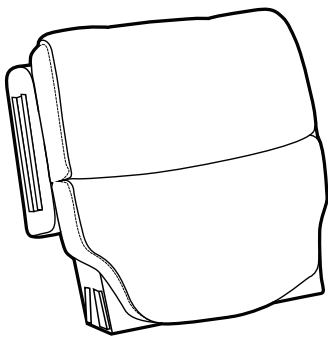


A. Back Cushion  
1 piece

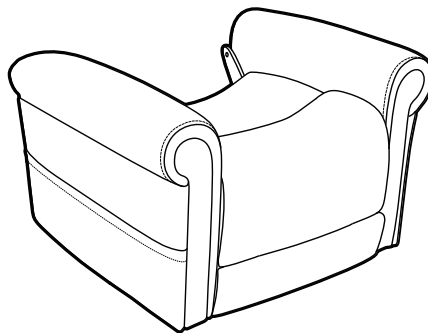


B. Seat Cushion  
1 piece

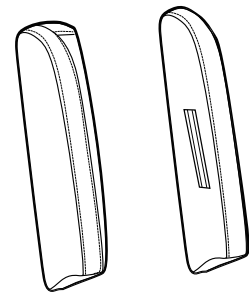

C. Back Wings (left & right)  
2 pieces  
(only on select models)

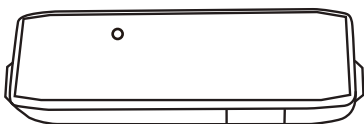

D. Power Transformer  
1 piece  
(varies depending on model)



E. Power Cord  
1 piece



F. Hand Control  
1 piece  
(hand control/power button  
control varies depending  
on model)



### STEP 1


Once the recliner has been removed from the box, you'll notice the Back Cushion (A) is laying on top of the Seat Cushion (B). (See Figure 1.)

Some models have Back Wings (C) that attach to the Back Cushion (A). When unpacking your recliner you will find these Back Wings (C) packed in the back of the recliner base. Please unpack the Back Wings (C) and set them aside for installation later. (See Figure 1.1.)

Locate the plastic bag that contains the Power Transformer (D), Power Cord (E), and Hand Control (F) (if applicable). This can be done by turning the Seat Cushion (B) over on its arms. You will see the plastic bag tied to the inside of the unit. Carefully cut the ties that hold the plastic bag to remove it. Dispose of the ties and bag properly. (See Figure 1.2.)

Connect the Hand Control (F) to the female plug located in the left-side-facing pocket of the recliner. (See Figure 1.3.) This step can be skipped if the model features a power button control. (See Figure 1.4.)

**Figure 1**

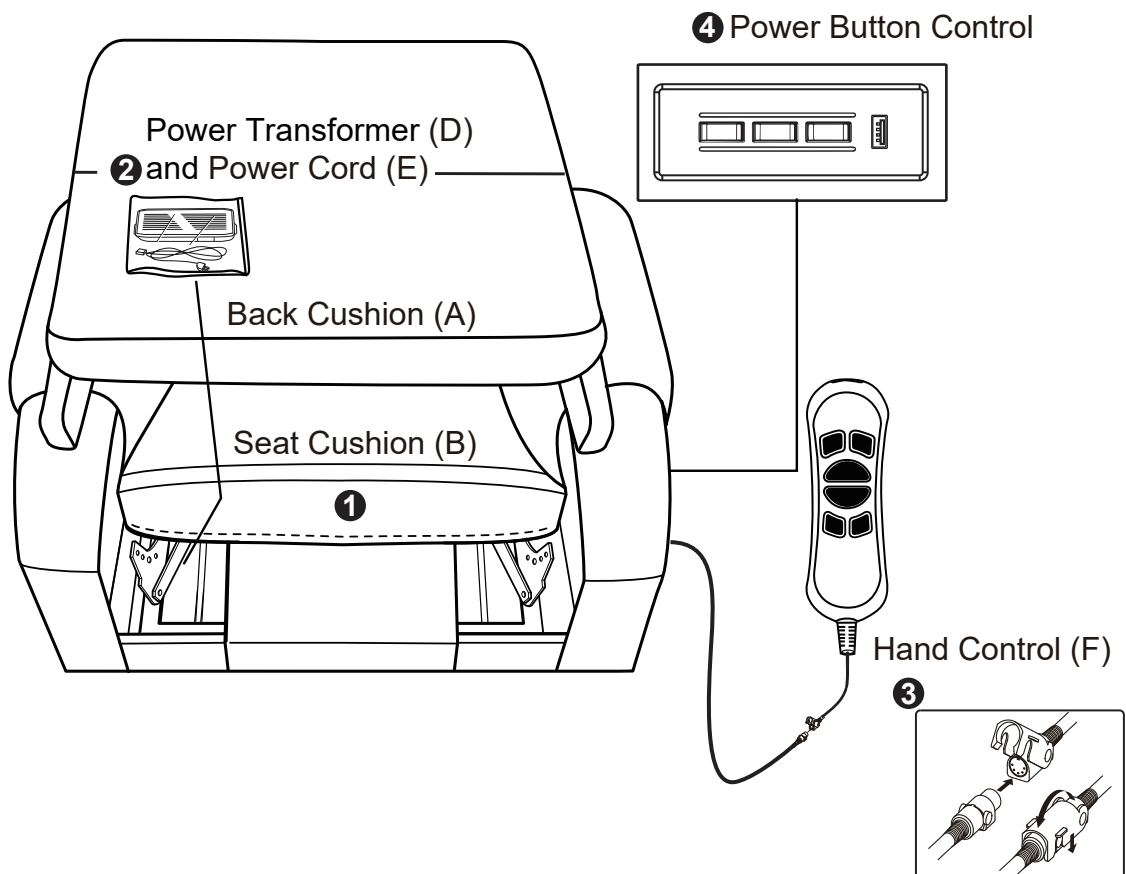




### STEP 2

To install the Back Cushion (A), align the female brackets in the Back Cushion (A) with the male brackets in the Seat Cushion (B) and slide the Back Cushion (A) down on the Seat Cushion (B). (See Figure 2.) Push down on the top of the Back Cushion (A) to lock into position. You will hear a click from each side of the chair to ensure the Back Cushion (A) is properly locked in .


**Figure 2**

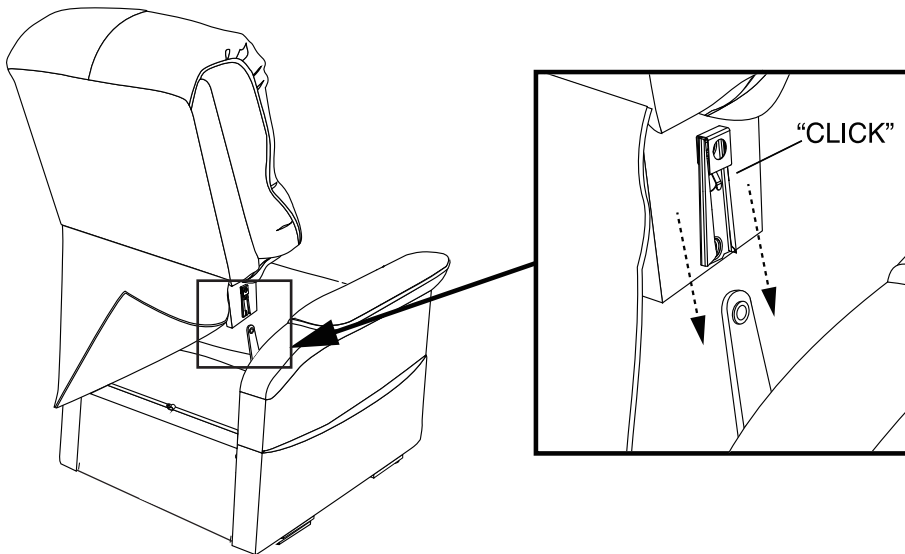

### STEP 3

If your model has Back Wings (C), align the male the female brackets and slide each (left & right) Back Wing (C) down into place. (See Figure 3.)

**Figure 3**

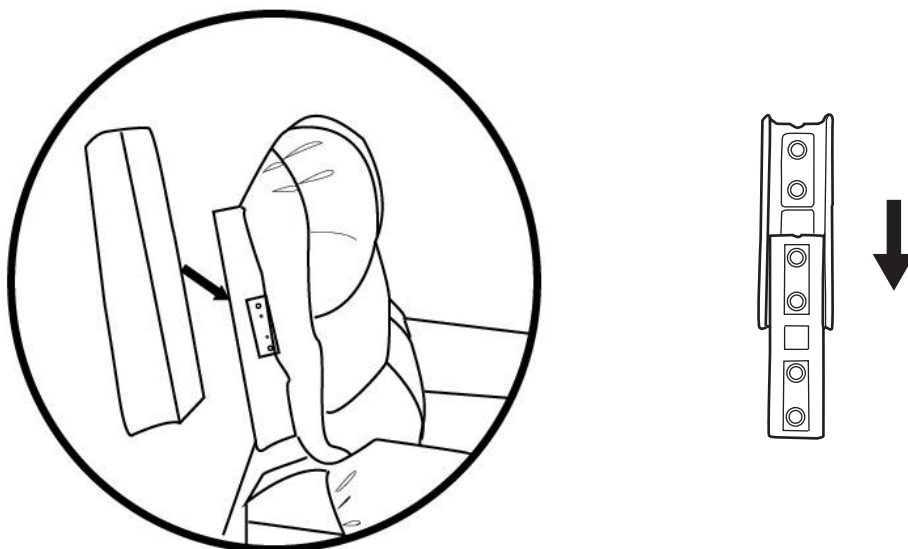




## Assembly Instructions

### STEP 4

Plug the Lumbar and Headrest connectors (if applicable). (See the Figure 4.)

**Figure 4**

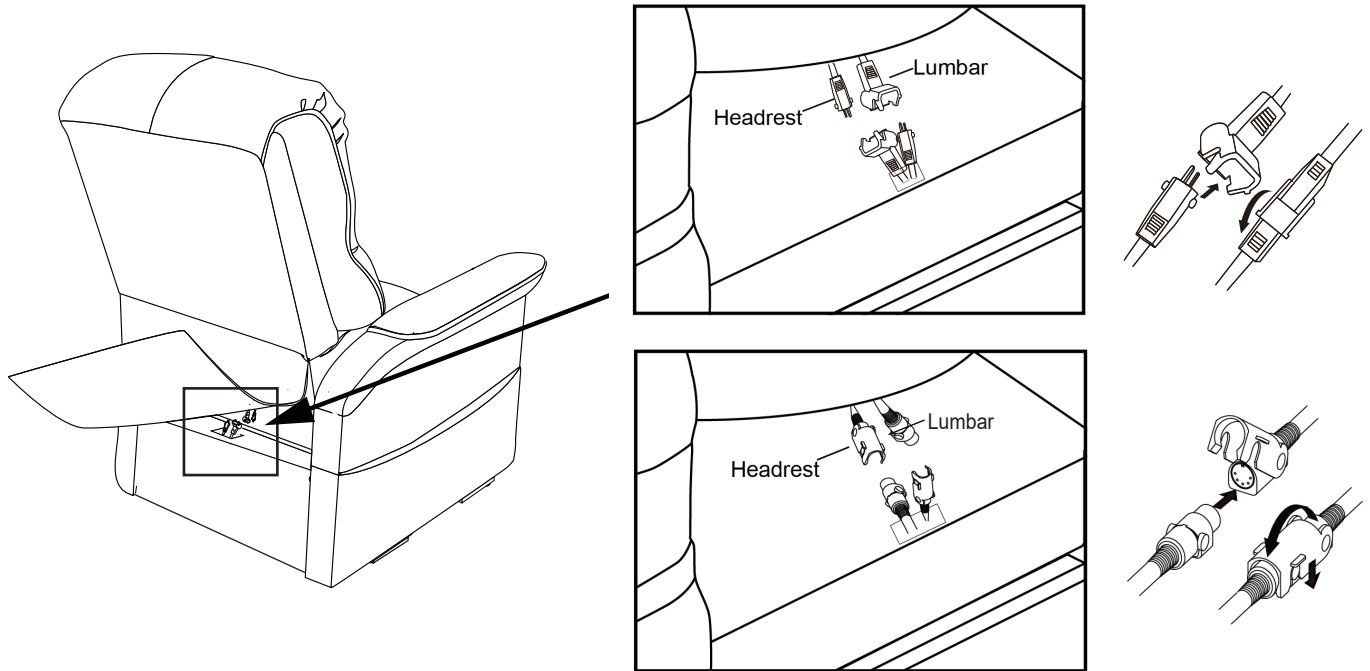


### STEP 5

Connect the Power Transformer Cable to the corresponding cable coming from the back of the recliner. (See Figure 5.1.)

Connect the Power Cord (E) to the Power Transformer (D). (See Figure 5.2.)

Connect the Power Cord (E) to an electrical outlet close to where the recliner will be used. (See Figure 5.3.)

**Figure 5**

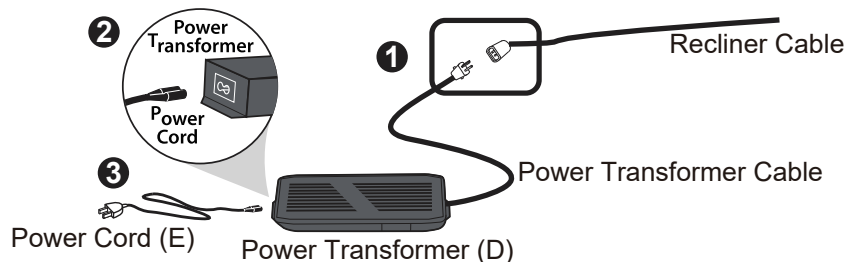

### IMPORTANT NOTE

- To avoid any risk of suffocation to children or pets, dispose of all plastic bags immediately.
- To ensure proper performance, occasionally check for loose screws and tighten as needed.
- If the reclining functions are not working properly, check for loose cable connections before contacting the retailer.

Product Protected By Following Patents:  
 Patented Articulating Power Headrest & Lumbar  
 US Patent: 10,736,423