

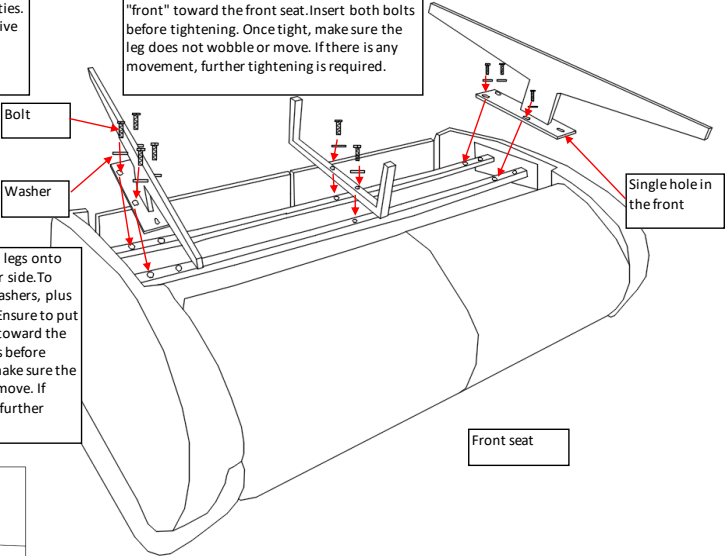


Assembly Instructions for Jasper Loveseat


2. Remove the leg and accessories from underneath the seat by cutting the white zip ties. Then remove protective packing materials covering the legs.

4. Assemble the center leg onto the mechanism in the middle. Ensure to put the side labeled "front" toward the front seat. Insert both bolts before tightening. Once tight, make sure the leg does not wobble or move. If there is any movement, further tightening is required.

3. Assemble the I-shaped legs onto the mechanism on either side. To apply, use 4 bolts and washers, plus the wrench to tighten. Ensure to put the side labeled "front" toward the front seat. Insert all bolts before tightening. Once tight, make sure the leg does not wobble or move. If there is any movement, further tightening is required.



1. Remove the wrench from the red bag, then put the wrenching bar through the hole on the side of wrench socket. This will be used to tighten the bolts as you

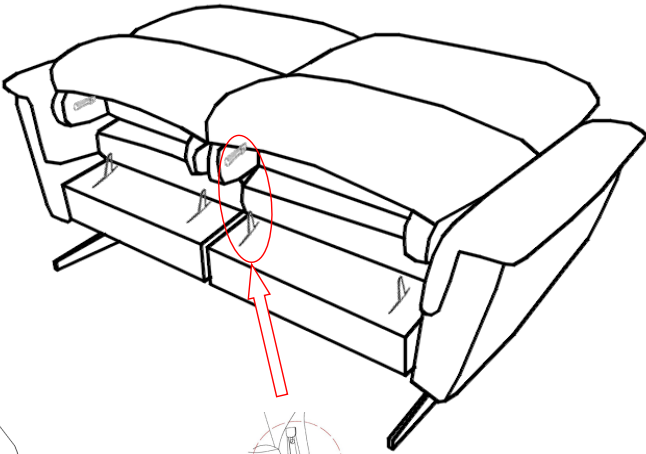

Note: Put the side of the back with gap

5. To apply the back onto the base, put base on the ground (upright), then slide the metal receiver on the back over the metal post on the base. Press both sides of back firmly downward until the receivers are firmly locked in place on

Parts List	
Name	Qty.
Wrenching Bar/Wrench Socket	1
Bolt	10
Washer	10
Center Leg	1
I-shaped Legs	2