


ASSEMBLY INSTRUCTIONS

Item #:BMSBSE

Please identify and locate all assembly parts (see parts list) before discarding any packing materials. Some parts may have become loose during transit.

Please remove protective cap before install.

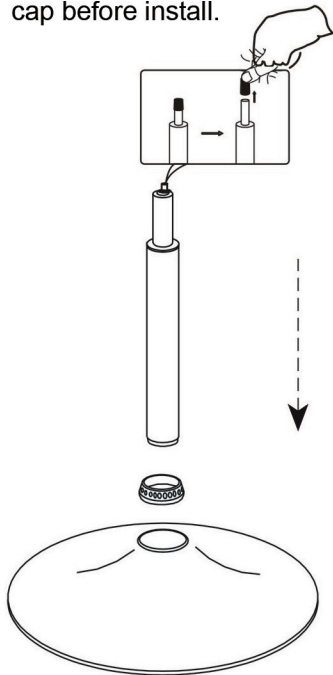


Step1:

Insert the base ring (#2) onto the top of the base (#3). Then insert the gas lift cylinder (#1) into the base ring (#2). Remove the protective plastic sleeve on the end of the gas lift cylinder (#1).


Step2:

Align the pre-drilled holes of the footrest assembly (#4) with the bottom of the seat (#7). Insert 4bolts (#6) through the footrest assembly (#4) and secure those bolts using the Allen wrench (#5) to lock them with the seat (#7).

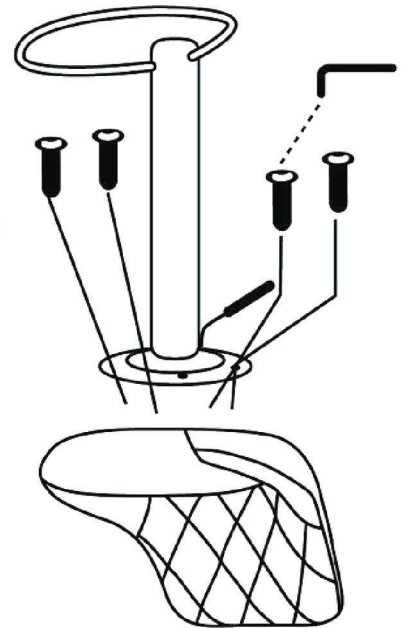

Step3:

Place the assembled seat/footrest assembly from Step 2 over the top of the assembled gas lift cylinder/base assembly from Step 1.

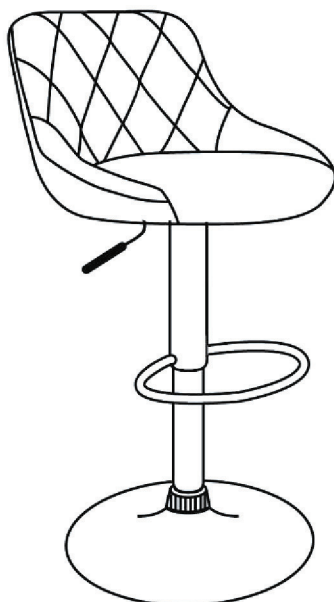

Step4:

Check to make sure all of the parts are secured, the bar stool is stable and the up/down lifts is working properly.

PARTS LIST

NO	SKETCH	DESCRIPTION	QTY
1		GAS LIFT CYLINDER	1PC
2		BASE RING	1PC
3		BASE	1PC
4		FOOTREST ASSEMBLY	1PC
5		ALLEN WRENCH	1PC
6		BOLT	4PCS
7		SEAT	1PC