

8 PCS

1 PC

8 PCS

 $\langle \bigcirc \rangle$ 


### BOX#1

A. HEADBOARD

1 PC

B. HEADBOARD LEG

2 PCS





## ALLEN BOLT(5/16"x1")

**HARDWARE PACKED IN BOX#2** 

2	ALLEN BOLT(5/16"x2-1/2")	8 PCS
3	FLAT WASHER(5/16")	24 PCS
4	LOCK WASHER(5/16")	16 PCS
5	WASHER(2")	4 PCS
6	WRENCH(5/16")	1 PC

ALLEN KEY(5/16")

HEX NUT(5/16"x12)


## BOX#2


B.	FOOTBOARD LEG	2 PCS
C.	SIDE RAIL	2 PCS
D.	FOOTBOARD	1 PC
E.	SLAT	39 PCS
F.	CENTER SLAT SUPPORT	2 PCS
G.	SIDE RAIL SLAT CLIP	26 PCS
Н.	CENTER SUPPORT SLAT CLIP	26 PCS
I.	SLAT SUPPORT LEG	4 PCS







В





















UPDATED:MAY 5TH, 2021








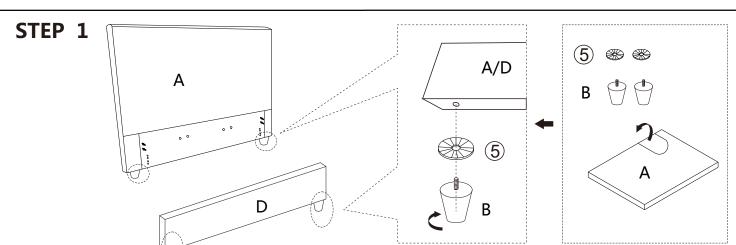


NOTE: USE FOOTBOARD LEG (B) PACKED IN BOX #2 FOR ASSEMBLY TO FOOTBOARD (D).

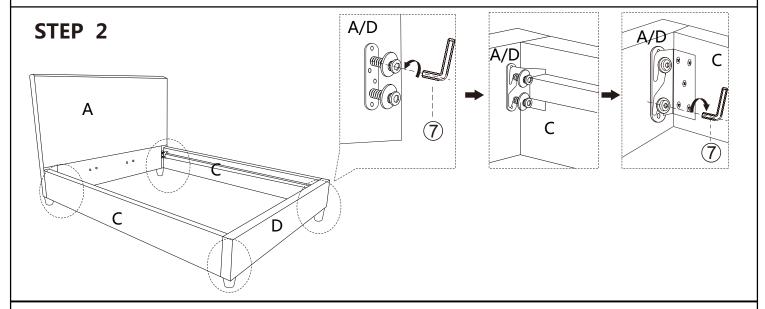





### **STOP**


- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 3, 4, 5,& 6 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 3.

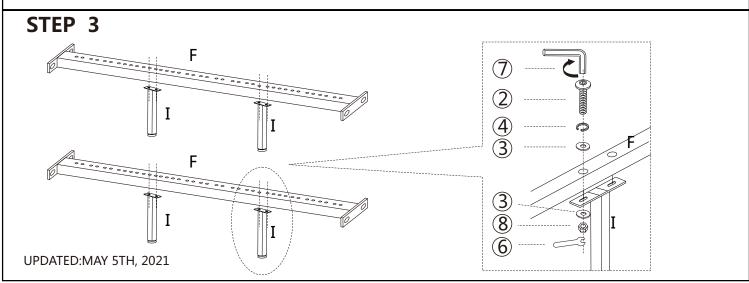




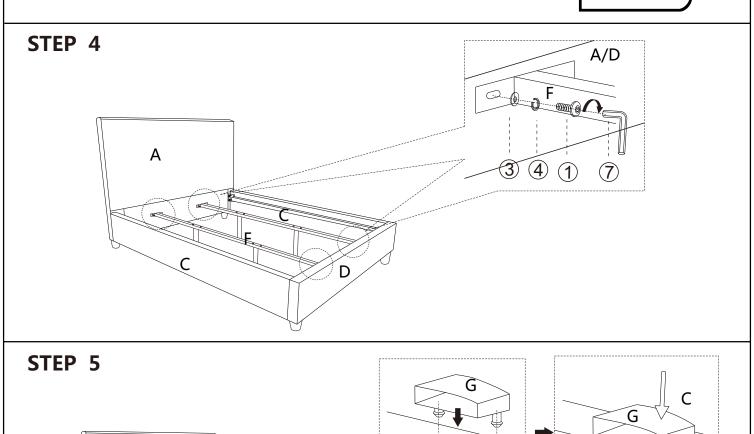

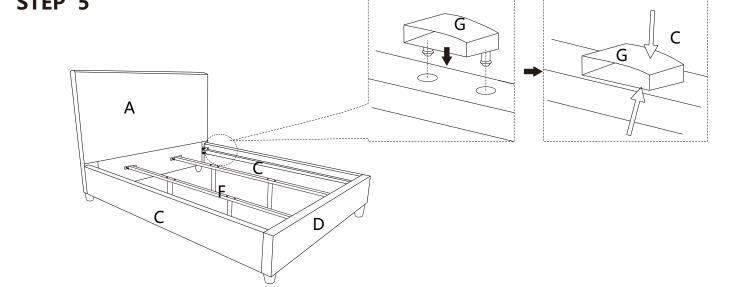

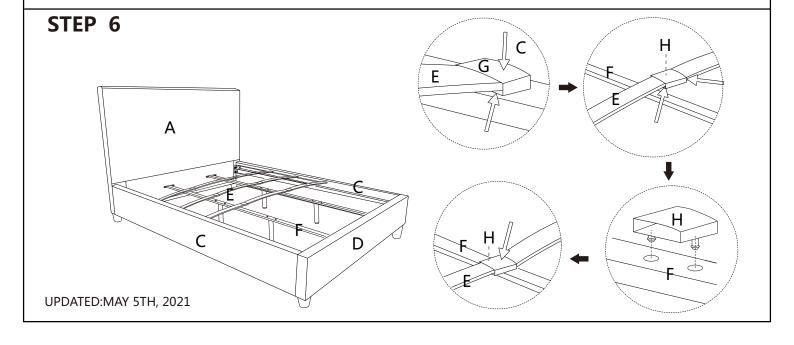



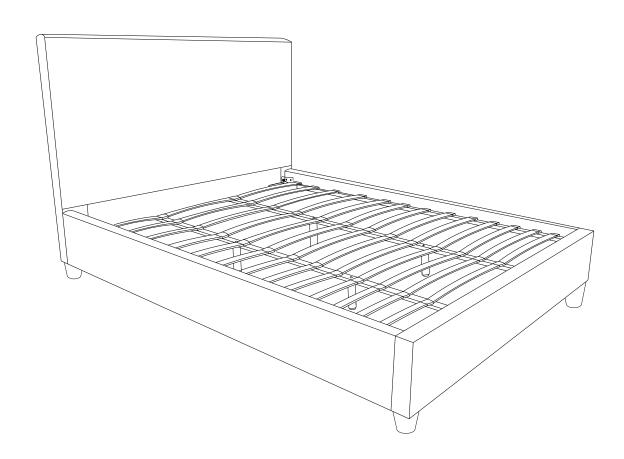


## ASSEMBLY COMPLETE.

### **INSTRUCTIONS FOR ADJUSTING LEVELERS:**

POSITION THE BED IN YOUR ROOM. LOCATE LEVELERS UNDER EACH SUPPORT LEG ( I ).

TURN COUNTER-CLOCKWISE TO EXTEND, CLOCKWISE TO RETRACT.

ADJUST LEVELERS UNTIL EACH LEG SUPPORT IS APPLYING EQUAL UPWARD PRESSURE ON THE CENTER SLAT.



### **MAINTENANCE INSTRUCTIONS:**

- REMOVE BOX SPRING AND MATTRESS BEFORE MOVING YOUR BED.
- LIFT YOUR BED WHEN MOVING IT. DRAGGING CAN DAMAGE CENTER SUPPORT.
- READJUST LEVELERS AFTER MOVING YOUR BED.

UPDATED:MAY 5TH, 2021



APPENDIX A:ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.

PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

### **WARNING!**


SIDE RAIL CLEATS ARE HELD IN PLACE USING PHILLIPS HEAD SCREWS. ONCE THEY ARE REMOVED THE USER WILL NOT BE ABLE TO SAFELY RE-INSTALL THE SIDE RAIL CLEATS FOR FUTURE USE WITH A STANDARD BOX SPRING OR FOUNDATION.

### THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

F. CENTER SLAT SUPPORT	2 PCS
E. SLAT	39 PCS
G. SIDE RAIL SLAT CLIP	26 PCS
H. CENTER SUPPORT SLAT CLIP	26 PCS
I. CENTER SUPPORT LEG	4 PCS

### **STEP 1:**

USE A PHILLIPS HEAD SCREWDRIVER (NOT PROVIDED) TO UNSCREW THE PHILLIPS SCREWS AND REMOVE THE PRE-ASSEMBLED SIDE RAIL CLEATS.

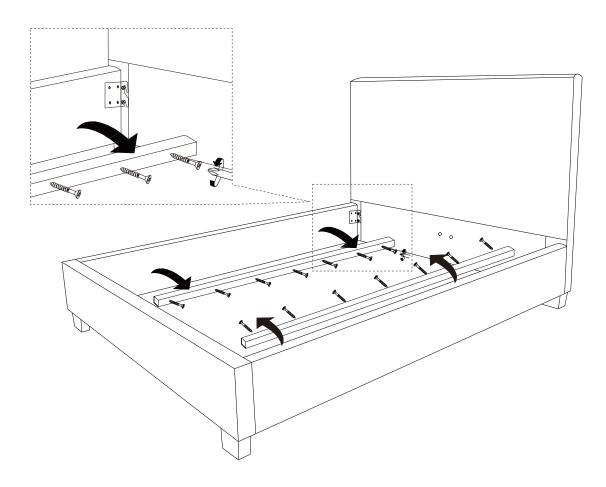

UPDATED:AUGST 14TH, 2021